

NAME OF PORT	HELLESYLT
Region/City/Port: Geirangerfjord cruise port	
Web:	www.stranda-hamnevesen.no
Official Port Address: Geirangervegen 2 6216 Geiranger	GEIRANGERFJORD CRUISE PORT IMO registered Port Facilities Hellesylt: NOHSY-0001
Date: 03.12.2018	

PORT			
Contact on arrival (detail name):		VHF channel:	13/16
PFSO on duty		Telephone:	+ 47 91 78 46 99/ + 47 99 53 17 17
		Notice required:	1 hour
Advise if passenger vessels have priority to berth	Yes		
Are there any restrictions on arrival/departure time	No		
Specify normal working hours for	8 - 18	Pilots	
		Linesmen	
		Tugs	
Notes:			
Duty and Service telephone, Hellesylt:	+ 47 91 78 46 99	24 hrs	
Maritime VHF (channel 13/16) or:	+ 47 99 53 17 17		
PFSO direct, Hellesylt:	+ 47 46 41 11 31		

To comply and accommodate to international environmental regulations:

Max number of passenger per day in port: **GEIRANGER:** approx 6000 pax – period: 20th June to 10th August

Max number of ships per day in port: Geiranger and Hellesylt: 2 – 4 (depending on the size of the ship)

TOWAGE	
Are tugs compulsory?	Yes <input type="checkbox"/> No x
Nearest tugs are available from Ålesund	Available with 12 hrs notice


BERTH	
Name:	HELLESYLT CRUISE PIER
Length:	143 m
Draft:	10,52 m
Actual depth:	9,38 m
Draft:	Deducted: extreme low water: 0,34 m, surface tolerance: 0,5 m and tolerance ground conditions: 0,3 m



GEIRANGERFJORD
CRUISE PORT

Location of berth:	Lat: N 62°05, 162' Long: E 006°52,521' Quay direction: 005,8°			
Max length/Draft permitted:	LOA: decided by master/pilot			
Type of the berth:	Mainly cruise, but also containers and bulk traffic			
Pier surface:	Concrete			
Height of pier above charted low water datum water:	4,0 m			
Type and spacing of fenders:	Tires	CC: 2,4 n	D: 1600	
Bollard spacing and bollard:	2 ex. 200T	Refer drawing		
Pull/strength:	1 ex. Buoy 136T			
Number of bollards:	and 12 ex. 100T			
Required side of ship alongside:				Starboard only
Do linesmen have motorboat:	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>		
Pier obstructions:	None			
Notes				
Maximum wind for docking 22, 5 m/s. ref. drawing for location, landbollard and mooring.				
Stern of the ship: 1 ex: mooring buoy (136T).				
At the pier: 12 ex. Bollards 100T / 1 ex. Bollard 200T. Bollard forward: 1 ex. 200T				

PILOTAGE				
Is pilot compulsory?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	VHF channel:	Channel : 13/16
Position of pilot station:	Lat: N 62°27,0'		Long: E 005°58,9'	
Range of tides & max.currents	1,5 – 2,0 m			
Approach channel width & depth	m			
Distance from pilot station to dock/anchorage	52 nautical miles.			
Estimated time from pilot station to dock & max. speed for transit	3, 5 hours.			
Air draft restrictions	None			
Other restrictions				
Minimum depth and diameter of turning basin	No dedicated turning basin. Width inner fjord 900 m with depth minimum 50 m			
Minimum depth alongside the pier	Hellesylt ferry port: Length 40 m/ Draft 5 m. (Not available for cruise ships, cargo only.)			
Notes:	In order to protect the environment, we reserve our right to ask all passenger vessels calling at Hellesylt to make use of the quay for embarking and disembarking, if the quay is available.			
Hellesylt: normally used in combination with Geiranger and Stranda on shore excursion				

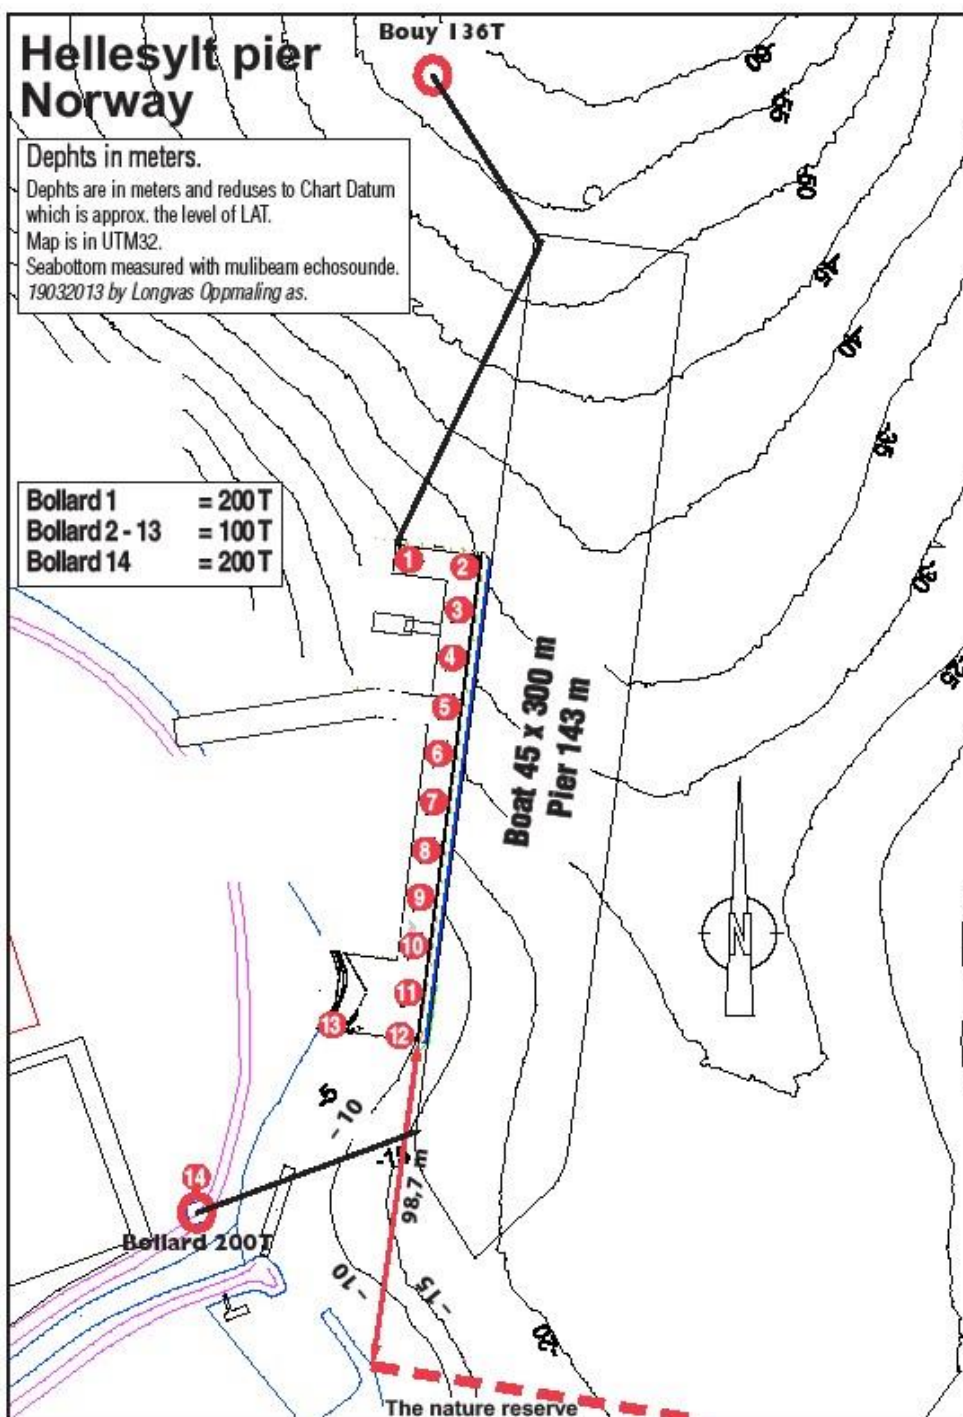

DISTANCE FROM BERTH TO CITY CENTRE:	200 m
Is there a passenger terminal	No
Shore gangway:	Not available

SECURITY AND VISITORS

Detail which facilities are in place

Each cruise ship will be allocated a tender pier for operation of tender boats and will exercise access control of respective areas for a specified period of time. SSO must establish security checkpoints (100%) at the entrance to restricted areas.

The PFSO has authorised access for personnel to the ISPS area as follows:

- Persons employed by Stranda Port Authority.
- Persons on official business (police, customs, pilots, fire brigade, Stranda Community).
- Crew on board the mooring boat.

All authorised personnel must wear an ID-card indicating admission to "Restricted areas".

The port/security personnel will carry out spot checks of the ID cards for a ship when going on-board. Advance notification of such spot checks will be provided.

Certificate ISPS plan approved	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	Details	
Name and contact of PFSO :	Rita Berstad Maraak Inge Hole William Shirima		Contact nr. + 47 46 41 11 13 Contact nr. + 47 46 41 11 31 Contact nr. + 47 46 41 11 34	
Hand luggage scanner available?	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>	Details	
Luggage scan available?	Yes <input type="checkbox"/>	No <input checked="" type="checkbox"/>	Details	
Fences present?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	Details	
Shore guards present?	Yes <input checked="" type="checkbox"/>	No <input type="checkbox"/>	Details	

Notes

SSO must establish security checkpoints (100%) at the entrance to restricted areas in Geiranger and Hellesylt.

Solid waste/ garbage: On request.
Fresh water : Not available
Grey/ black water: On request
Washing with fresh water: Confirmed
Permit of touch with paint: confirmed. Consideration must be given to the environment
Maintenance work: confirmed. Hot work on request due to fire preparedness
Fuel: not available

OTHER ENVIRONMENTAL ISSUES

Additional useful information

- Ships using garbage/ waste burners on board must switch them off when entering the port area.
- Tender-boats must stop engines at ship's side and alongside jetty.
- Permission is given to lower anchor, to lower painting raft, lifeboats, pontoon, diving and to conduct boat drill and bell.

New environmental regulation in the Geirangerfjord area.

The Norwegian Maritime Authority proposes environmental regulations for the world heritage fjords, intended to enter into force 1st March 2019.

Use of scrubber system

- **Open scrubber systems:** not accepted as equivalent solution to comply with the Sulphur requirement.
- **Close loop scrubbers:** permitted provided measures are installed to reduce emission of visible smoke/vapour.
- Fuel with Sulphur content of **maximum 0.1 %** is permitted.

The requirements applies independently of when the ship has been built Ref. MARPOL Annex VI/13

Use of incinerator

- Use of incinerator in the Geirangerfjord is **prohibited**.

Black water and greywater

- It is **prohibited** to discharge blackwater and greywater into the fjords.
- Black water and grey water which is managed by a ship in accordance with MARPOL Annex IV, regulation 9.1 is not considered "black water" and "grey water".